

## TABLE MAT

### 32-190-11xx


Double layer table mat with a dissipative top-layer and a conductive bottom layer

#### Physical properties

Abrasion resistance:	$\leq 200 \text{ mm}^3$ (ISO 4649, Method A)
Hardness:	75 Shore A +/-5 (ISO 7619)
Residual indentation:	$\leq 0.2 \text{ mm}$ (EN 433)
Thickness:	2.0 mm

#### Electrical properties

Resistant to ground:	$\leq 10^9 \Omega$
Surface resistance:	$\leq 1.0 \times 10^9 \Omega$
Compliant to:	IEC 61340-5-1

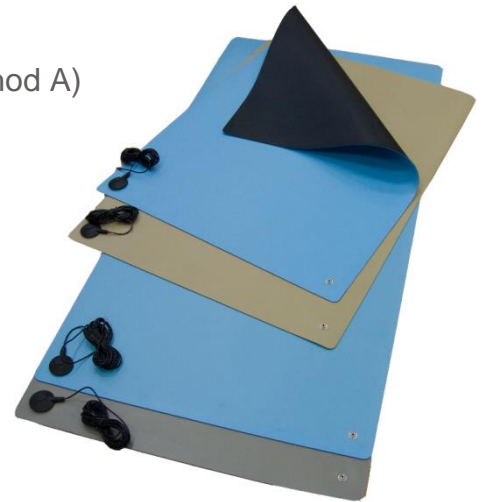

#### Dimensions, Features and Part Number

Part Number	Shape	Dimensions	Colour
32-190-1102	Complete Roll	1.22m x 10m	Beige
32-190-1103			Grey
32-190-1104			Blue
32-200-2609	Pre-cut	61cm x 90cm	Beige
32-200-3609			Grey
32-200-4609			Blue
32-200-2612	Pre-cut	60cm x 120cm	Beige
32-200-3612			Grey
32-200-4612			Blue

Pre-cut mats are supplied with 2 x 10mm male studs and grounding cord (ref 30-560-1510)

#### Options

Other cut sizes and mat equipment available on request